

Features

- Two oval handles allows for both volume and temperature control
- 2.0 gpm (gallons per minute) traditional handshower.
- 1/2" (13 mm) quarter-turn washerless ceramic disk valves.
- Diverter spout: 9-5/8" (244 mm) reach inlet to outlet.
- Height base: 1-13/16" (46 mm) base to outlet.
- Traditional handshower with 60" (1524 mm) hose.
- Premium Metal Construction
- Floor Or Wall-Mount installation
- Deck-mount bath faucet
- KOHLER ceramic disc valves exceed industry longevity standards two times for a lifetime of durable performance
- Solid brass construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards two times
- Completes Antique design solution
- Requires K-101 wall-mount adapter kit or K-126, K-127, or K-128 Antique riser tubes, and K-264 ceramic oval handle insets (sold separately).

Installation

- Bath- or deck-mount.

Required Products/Accessories

- K-126 Riser Tubes
- or
- K-101 Wall-mount Adapter Kit
- or
- K-264 Bath Handle Insets
- or
- K-127 Riser Tubes
- or
- K-264-BR Bath Handle Insets
- or
- K-264-FL Bath Handle Insets
- or
- K-264-PH Bath Handle Insets
- or
- K-264-WF Bath Handle Insets



Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CW	Polished Chrome with White Accents
	PB	Vibrant® Polished Brass
NA	PW	Vibrant® Polished Brass with White
	BV	Vibrant® Brushed Bronze
	AU	Polished Gold

Floor-mount installation shown. Wall-mount option available.

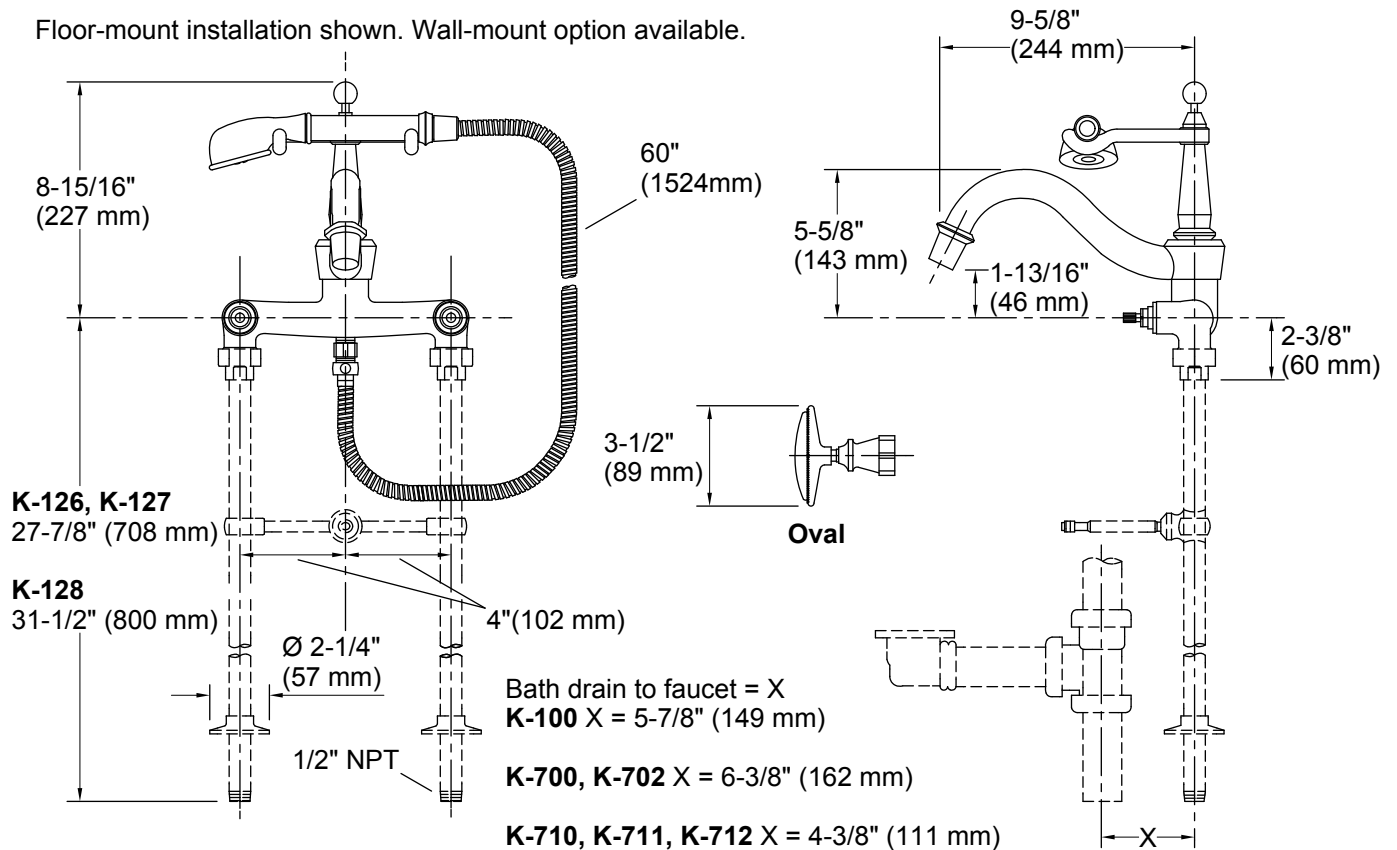

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min)

Notes

Install this product according to the installation guide.