



### Features

- The K-1122-XHGLA bath offers both a whirlpool hydromassage and BubbleMassage air bubbles for a truly relaxing bathing experience.
- 118 airjets release thousands of bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Single-speed whirlpool offers performance and value, with 8 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Built-in heater.
- Comfort Depth® design offers a convenient 19-inch step-over height while retaining the same depth as a standard 21-inch bath.
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Integral apron.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface.
- Left-hand drain.
- Coordinates with other products in the Archer collection.

### Material

- Acrylic

### Hydrotherapy

- BubbleMassage
- Whirlpool

### Installation

- Three-wall alcove.

### Additional Hydrotherapy Options

- Soaking Bath - K-1123-LA
- Soaking Bath + Bask heated surface - K-1123-LAW
- BubbleMassage air bath - K-1122-GLA
- BubbleMassage air bath + Bask heated surface - K-1122-GLAW
- VibrAcoustic - K-1122-VBLA
- VibrAcoustic + Bask heated surface - K-1122-VBLAW
- Whirlpool - K-1122-LA
- Whirlpool + heater - K-1122-HL
- Whirlpool + Bask heated surface - K-1122-LAW
- Whirlpool + BubbleMassage air bath - K-1122-XHGLA

### Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain



### ADA

### Codes/Standards







ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
Greenguard UL 2818 - Gold  
ADA  
ICC/ANSI A117.1

**KOHLER® Plastic Baths and Receptors  
Lifetime Limited Warranty  
KOHLER® Hydrotherapy Components  
Five-Year Limited Warranty**

See website for detailed warranty information.




### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                                | Code | Description |
|--------------------------------------------------------------------------------------|------|-------------|
|  | 0    | White       |
|  | 96   | Biscuit     |
|  | 47   | Almond      |
|  | NY   | Dune        |
|  | 95   | Ice™ Grey   |
|  | G9   | Sandbar     |

## 5' BubbleMassage™ Whirlpool Bath K-1122-XHGLA

No change in measurements if connected with drain illustrated. (K-7271 or K-7272)

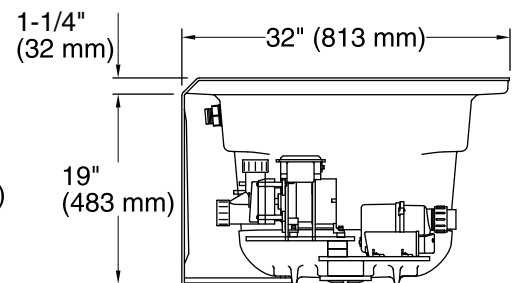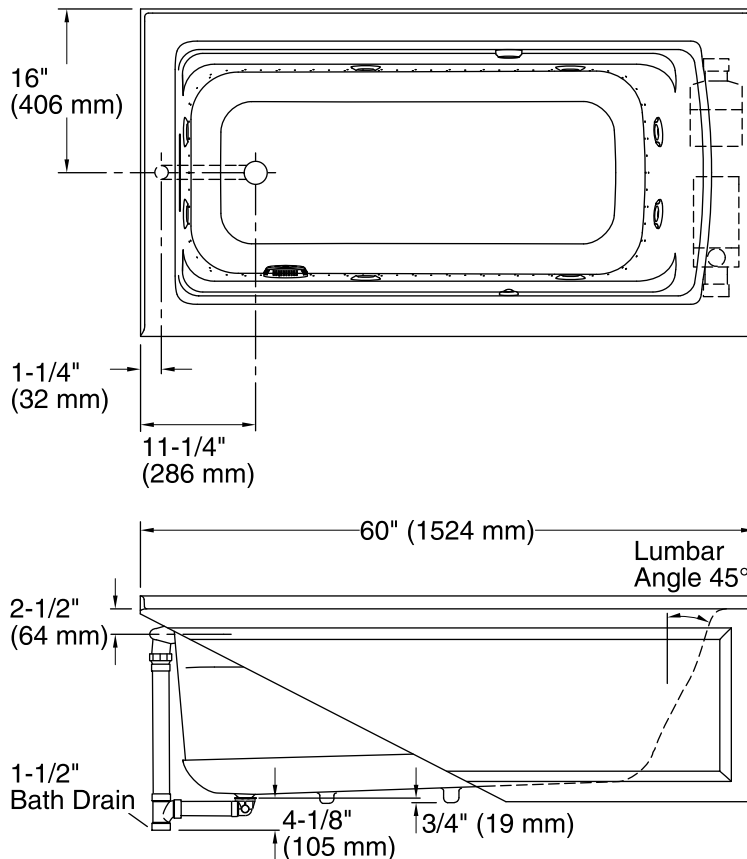

### Required Electrical Service

Three dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

|         |                    |
|---------|--------------------|
| Blower: | 120 V, 15 A, 60 Hz |
| Pump:   | 120 V, 15 A, 60 Hz |
| Heater: | 120 V, 15 A, 60 Hz |

### Technical Information

All product dimensions are nominal.

|                              |                                                                                               |
|------------------------------|-----------------------------------------------------------------------------------------------|
| Installation:                | Three-wall alcove                                                                             |
| Drain location:              | Left                                                                                          |
| Basin area, bottom:          | 45-1/8" x 19-11/16" (1146 mm x 500 mm)                                                        |
| Basin area, top:             | 52-3/4" x 25-5/16" (1340 mm x 643 mm)                                                         |
| Weight:                      | 160 lbs (72.6 kg)                                                                             |
| Minimum floor load:          | 52 lbs/ft² (253.9 kg/m²)                                                                      |
| Water depth:                 | 15" (381 mm)                                                                                  |
| Water capacity:              | 58 gal (219.6 L)                                                                              |
| Electrical component rating: | Blower: 120 V, 10 A, 60 Hz<br>Pump: 120 V, 7 A, 60 Hz<br>Heater: 120 V, 12.5 A, 60 Hz, 1500 W |
| Blower speed:                | Variable                                                                                      |

### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Remote blower installation kit is available for relocating the blower. Provide access for servicing the blower.

Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly.

ADA compliant when installed to the specific requirements of these regulations.