

### Features

- Single lever handle allows for both volume and temperature control
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- Includes touch-activated drain with 1-1/4" tailpiece and overflow.
- 5-5/16" (135 mm) spout reach.
- Coordinates with Stance faucets, accessories, and showering components to complete your bathroom.
- Premium Metal Construction
- For single-hole installation.
- Pre-attached flexible supply lines simplify installation
- Single-handle sink faucet for single-hole installation
- Solid brass construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing.
- Flexible supply lines
- KOHLER ceramic disc valves exceed industry longevity standards over two times for a lifetime of durable performance
- Fluid design lines for ease of cleaning
- Coordinates with Stance faucets and accessories.
- 1.2 gpm (gallons per minute) flow rate.

### Installation

- Bath- or deck-mount.



ADA CSA B651 OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC



### KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

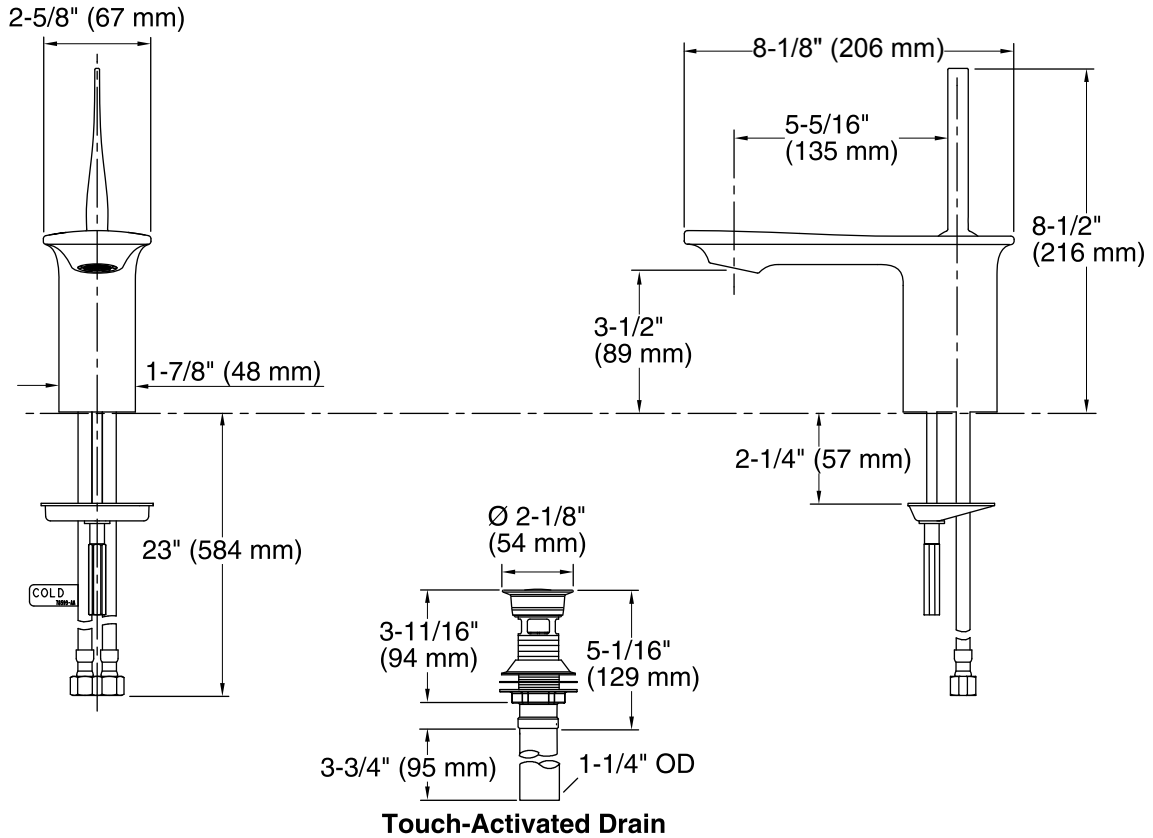

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Drain with overflow: Yes

Drain tailpiece included: Yes

#### Spout:

Spout reach: 5-5/16" (135 mm)

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.